
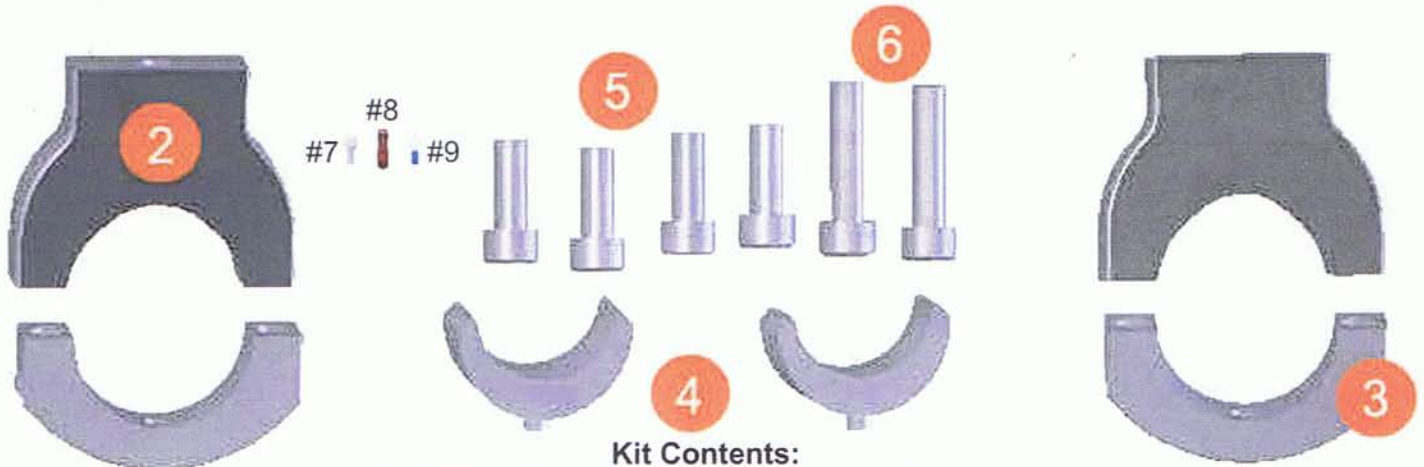


Dock-N-Rock Instructions

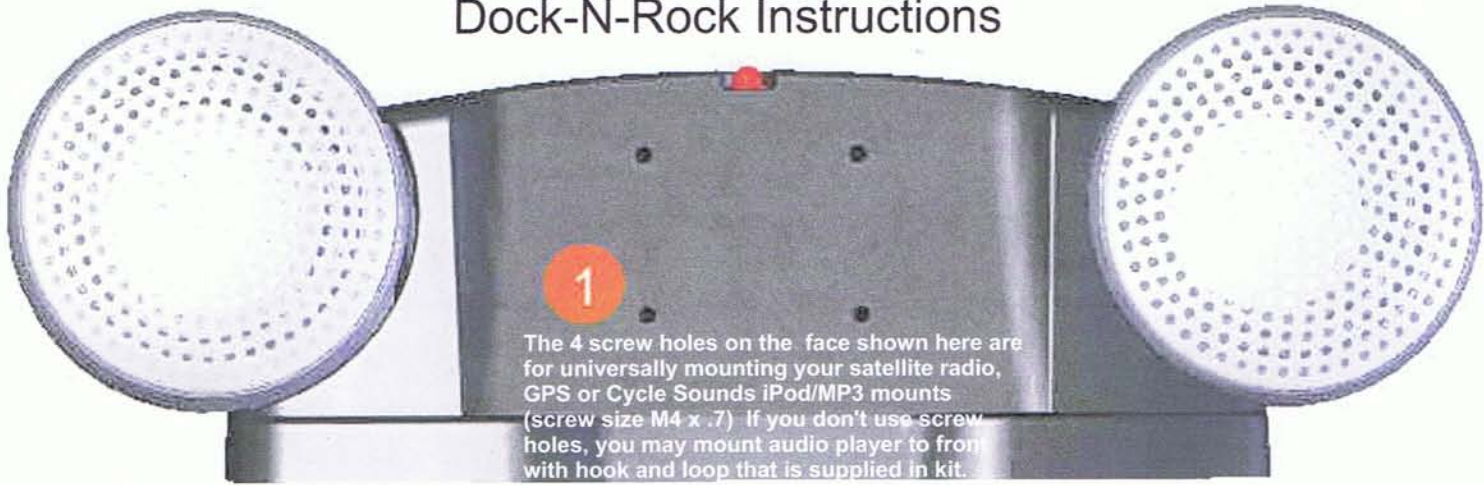

Kit Contents:

- #1 - Dock-N-Rock base with speakers attached
- #2 - 1 pair of base mounts
- #3 - 1 pair of bottom crescent clamps
- #4 - 1 pair of 1/2" insert shims
- #5 - Qty. (4) Clamp bolts qty.
- #6 - Qty. (2) base bolts to secure #2 mounts to bottom of base
- #7, #8 & #9 - 3M connectors

Tools Needed:

- 1/4" Allen
- pliers
- wire cutters
- thread locking compound

**CYCLE
SOUNDS™**
SOUNDS FOR YOUR BIKE!

Step 1) Check to make sure everything came in your package, next make sure you have all the tools needed to complete install.

Step 2) Mount (#2) to fit left and right of your riser clamp (making sure to clear your bar clamp, there are 4 different positions to mount to the bottom of Dock-N-Rock base), when you have a good fit secure (#2) with bolts (#6) (**use caution not to over tighten**). **Use thread locking compound on all bolts.**

Step 3) When mounting on 1" bars fit insert shim (#4) into hole in bottom of crescent clamps (#3), complete clamp fitment by installing the four bolts (#5) into crescent bolt holes tighten with 1/4" Allen; (**use caution not to over tighten**). For 1-1/4" bars do not use (#4) shims. When installing on Road King you must remove mounting nub on shims (#4) and install them on the top of the bar under mount (#2) this will give you 1/2" more clearance for the Road King riser clearance. **Use thread locking compound on all bolts.**

Step 4) Run mating amp plug to amp connector on Dock-N-Rock connect together and run down tank channel to battery compartment. Amp connector comes pre-wired with oem style wire connectors that plug into our optional T-Tap Accessory (part# 2120-0026). Some bikes may need other connectors provided in kit. (#7, 8, 9) You will need to take a digital amp meter and find the accessory wire on bike, use (#8) red t-tap locking connector onto wire, use (#7) crimp on amp red wire, plug into (#8) and use (#7) to crimp on amp black wire, then bolt to battery terminal ground.

Step 5) Run headphone jack up to front of Dock-N-Rock, use hook and loop to connect your audio source to front of Dock-N-Rock, plug in 3.5mm jack and enjoy your tunes. Optional mounts are available for iPod 1st, 2nd, 3rd and 4th generation, iPod Nano, iPod Touch, iPhone, iPhone 3G, GPS mounts, satellite radio mounts. Visit www.cyclesounds.com for all your options.